

Stowe DV Gas Stove



STOWE MODEL 8323 OYSTER ENAMEL

A Beautiful Room Heater

FINISH OPTIONS:




Matte Black



Brown Majolica Enamel



Oyster Enamel

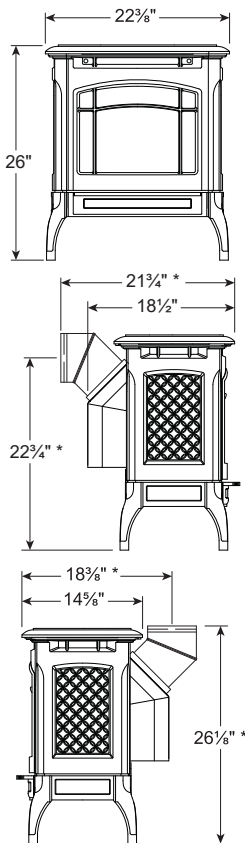

*Shown with 45° elbow venting.
Dimensions may vary depending on venting manufacturer.

CLEARANCES

- Rear.....3" (77mm)
- Side4" (102mm)*
*6" with side walls deeper than 18"
- Corner4" (102mm)
- Floor Protection:
Non-combustible surface or wood floor

STOWE MODEL 8324 STANDING PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron refractory** - Features a traditional brick pattern
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Thermostatic remote control (optional)** - On / Off thermostatic mode
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **Convenient standing pilot** - Quick and reliable starts all year round
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/off, manual rheostat control
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to.....	1,200 sq ft
Steady State Efficiency.....	80.1%
P.4.1.09 Fireplace Efficiency.....	75.7%
Burn Rate Range NG.....	15,000-22,400 BTUs/hr
Burn Rate Range LP.....	15,000-22,400 BTUs/hr
Venting.....	45°, 4" x 6-5/8" DV
Ignition System.....	SIT Nova
Burner.....	Ceramic Burner
Thermostatic Remote Control.....	Optional
Safety Barrier Screens.....	Included
LP Conversion Kit.....	Included
Mobile Home Certified.....	Yes
Weight.....	155 lbs.

ACCESSORIES

Convection Blower.....	93-57230
Thermostatic Remote Control Kit.....	90-56914

STOWE MODEL 8323 ON-DEMAND PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron refractory** - Features a traditional brick pattern
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Remote Control** - Offers flame adjustment, thermostatic mode, programmable timer
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **Efficient on-demand pilot** - Conserves energy in warm weather, offers reliability in cold weather
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/off, manual rheostat control
- **Secure battery power** - Operates the stove during a power outage (Requires 110V for optional blower)
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to.....	1,200 sq ft
Steady State Efficiency.....	80.1%
P.4.1.09 Fireplace Efficiency.....	75.7%
Burn Rate Range NG.....	13,000-22,400 BTUs/hr
Burn Rate Range LP.....	14,000-22,400 BTUs/hr
Venting.....	45°, 4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Burner.....	Ceramic Burner
Remote Control.....	Included
Safety Barrier Screens.....	Included
LP Conversion Kit.....	Included
Mobile Home Certified.....	Yes
Weight.....	155 lbs.

ACCESSORIES

Convection Blower.....	93-57230
Wall Touch Pad.....	7000-260
A/C Adaptor.....	7000-070

Refer to Owner's Manual for exact specifications prior to installation.